


Fiber Optic Outdoor –Type GYTA

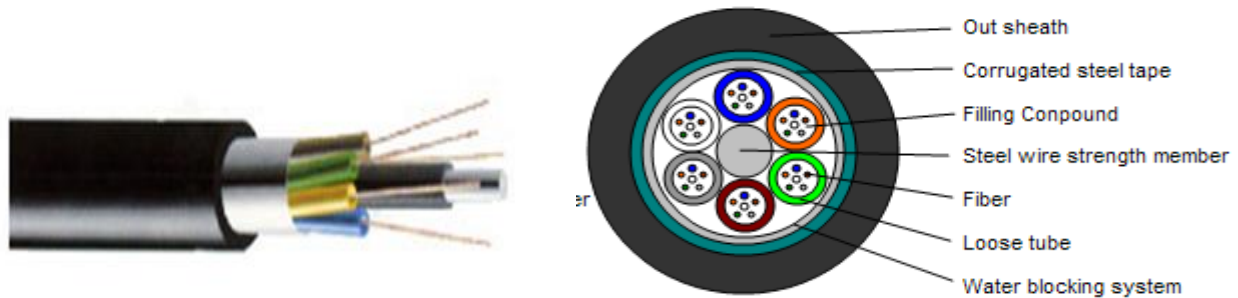

Application			Characteristics						
<ul style="list-style-type: none"> ☆.Adopted to Outdoor distribution. ☆.Suitable for aerial pipeline laying method. ☆.Long distance and local area network communication. 			<ul style="list-style-type: none"> ☆.Steel wire strength. filler protect tube Fiber. Aluminum tape armord. ☆.Good ultra violet radiation resistant property. ☆.Good moisture-resistance. 						
Technical Parameters									
Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
			short term	long term	short term	long term	short term	long term	
24	10.5	105.00	1500	600	1000	300	20D	10D	-40+60
36	10.5	105.00	1500	600	1000	300	20D	10D	-40+60
42	10.5	105.00	1500	600	1000	300	20D	10D	-40+60
48	12.0	150.00	1500	600	1000	300	20D	10D	-40+60
60	12.0	150.00	1500	600	1000	300	20D	10D	-40+60
72	12.0	150.00	1500	600	1000	300	20D	10D	-40+60
Multimode	G.651	A1a:50/125	Graded-index fiber						
		A1b:62.5/125							
Singlemode	G.652(A、B、C、D)		B1.1:Conventional fiber						
	G.653		B2: Zero dispersion shifted						
	G.654		B1.2 :Cut-off wavelength shifted						
	G.655		B4: Main technical data for positive dispersion shifted single-mode fiber						