


FTB/FDB-2I80 Fiber Optic Terminal / Distribution Box

Model: CoreTECH FDB-2I80

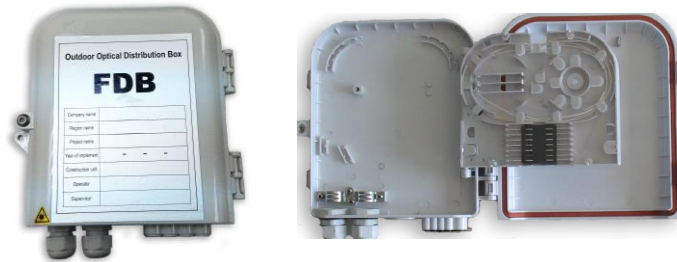

Application

- Applicable for wall-mounted, Indoor or Outdoor rails
- To be used at home or working area to accomplish double-core fiber access and port output
- Suitable for Telekom UniFi

Features

- PLC splitter is compatible with 3 wavelength (1310/1490/1550)
- Low insertion loss and high directivity, high quality, reliability, and performance
- Available for : 1x8, 2x8
- FTTH (Fiber To The Home) network and CATV system application
- Suitable for SC,LC duplex adapter
- Design to protect splitter
- Bracket preparation that can be fixed when installing it on wall
- Application for outdoor, IP65 grade
- 2 inlet ports, 8 outlet ports.

Specification

Model	CoreTECH FTB/FDB-2I80
Dimension (mm)	200mm(W)x215mm(H)x54mm(D)
Weight (Kg)	0.6 kg
Protection Rating	IP 65
Cable diameter (mm)	Φ7~Φ10
Splice Point Storage Capacity	8
Humidity	93% at 40°C