2core FTTH Outdoor Armoured Drop Cable

Model : FBDC-O-02-A

Colored Coating Fiber (2-fiber)
Strength Member (FRP/STEEL)
Jacket (LSZH)
Steel Tape
PE Jacket
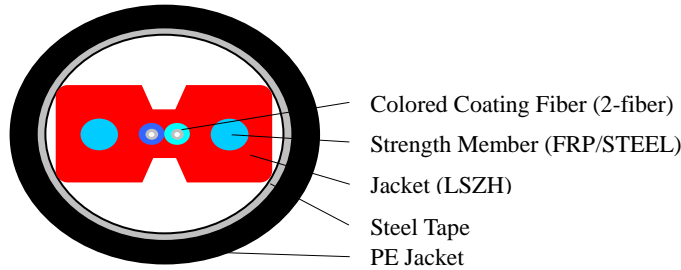
Application

- Used in the access network or CPN introduced into the room from the outside cable.
- Integrated wiring in buildings used for the introduction of cable, especially when the introduction of indoor or outdoor overhead wiring
- Fiber To The Home.

Features

- Has good mechanical and environmental performance.
- Flame (or retardant) performance to meet the standards.
- Sheath of the mechanical and physical properties to meet the relevant standards.
- Easy installation, flexible, convenient connecting and supporting high-capacity data transmission.
- Meet market and user demands.

Customization

- Fiber types: single-mode G.652 or G.655 or G657fiber, A1a or A1b multimode fiber, or other models and types of fiber.
- Jacket material: Polyethylene (PE), smoke halogen (LSZH), polyurethane (TPU) or other agreed material.
- Jacket Color: (including fiber optic cable in color) the color of the standard requirements, but also other agreed upon color.
- Cable Size: Nominal fiber size, or other agreed size..

Cable Parameters

Items		Specifications
Fiber Count		2
Strength Member		FRP/ Steel
Covered Wire Cable Spec.	Dimension	3.0±0.1×2.0±0.1mm
	Material	LSZH
	Color	Black
Jacket	Dimension	7.2±0.1
	Material	PE
	Color	Black